



204 SERIES AEV



Designed for Spanish market.
Poppet Valve closubg system.
BSP threads and other available upon request.

• Materials

Carbon Steel *EN-10277-3*

Seals: NBR, Viton or EPDM

Springs: *Carbon Steel DIN 17233/84(B)*

• Working temperature (Seals)

	NBR	Viton	EPDM
+	+100°C	+200°C	+150°C
-	-30°C	-10°C	-40°C

- **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC Special for American market


• Sectors: Agricultural



MODEL STRUCTURE

Example;

204.12113 AD

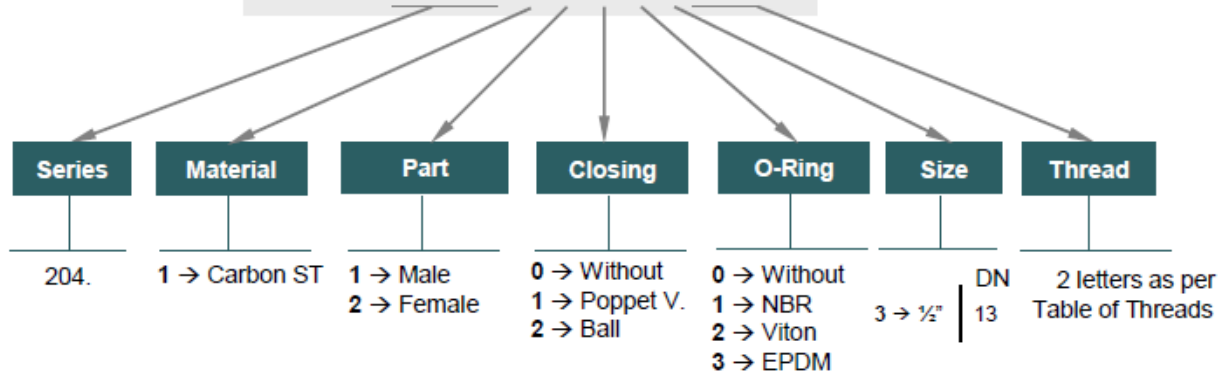


204-1




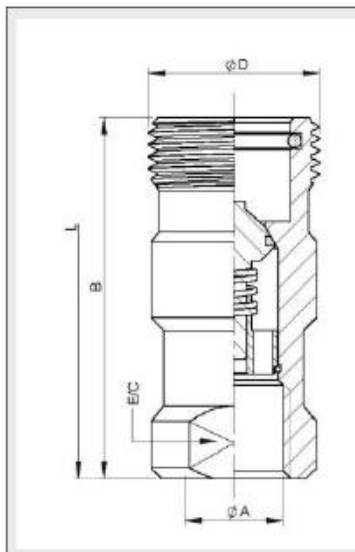


204 SERIES AEV

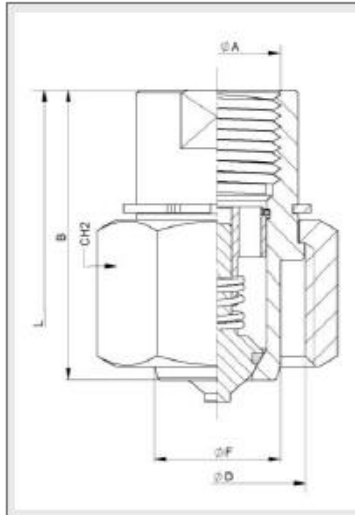


MALE

DN	ϕA	E/C	CH2	B	ϕF	ϕD	L	REF.	
13	1/2" BSP	25	36	49,5	21,80	30,50	88	204.11113AD	400 Bar



FEMALE

DN	ϕA	E/C	B	ϕD	L	REF.	
13	1/2" BSP	27	69,5	33	88	204.12113AD	400Bar



204 SERIES

AEV



CAPS



MODEL STRUCTURE

Example;

204.1303 AA

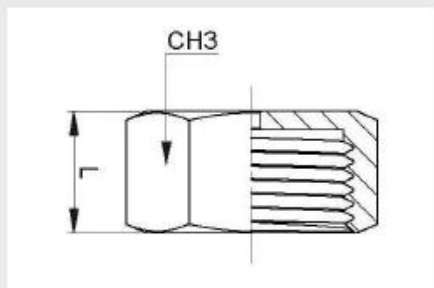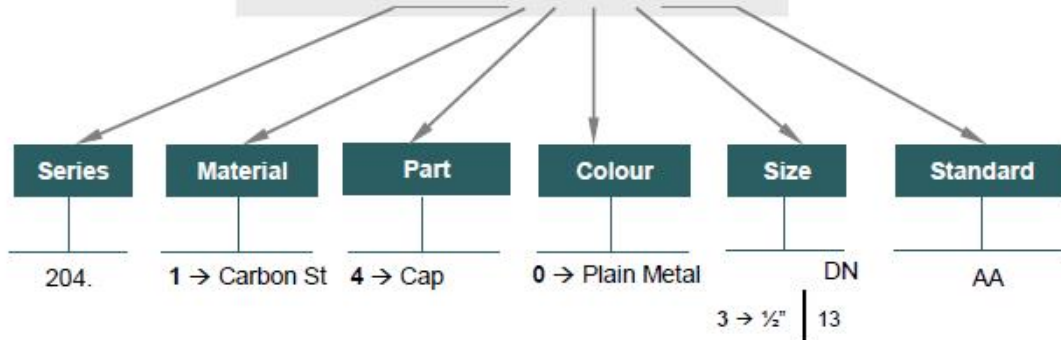

CAP			
DN	REF.	CH3	L
13	204.1303AA	36	20

204-3

