



# 128 SERIES TVZ



Manufactured according to the requirements of the most important truck manufacturer.

### • Materials

Carbon Steel *EN -10277-3*,

Seals: NBR, Viton or EPDM

Back-up-ring: PTFE

Balls: *AISI 1010/1015*

Springs: *Carbon Steel DIN 17233/84(B)*

• **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC


### • Equivalence

TALLERES ARIZA

### • Working temperature (Seals)

	NBR	Viton	EPDM
+	+100°C	+200°C	+150°C
-	-30°C	-10°C	-40°C


• **Sectors:** Agricultural, Industrial



### MODEL STRUCTURE

Example;

## 128.11215 AF

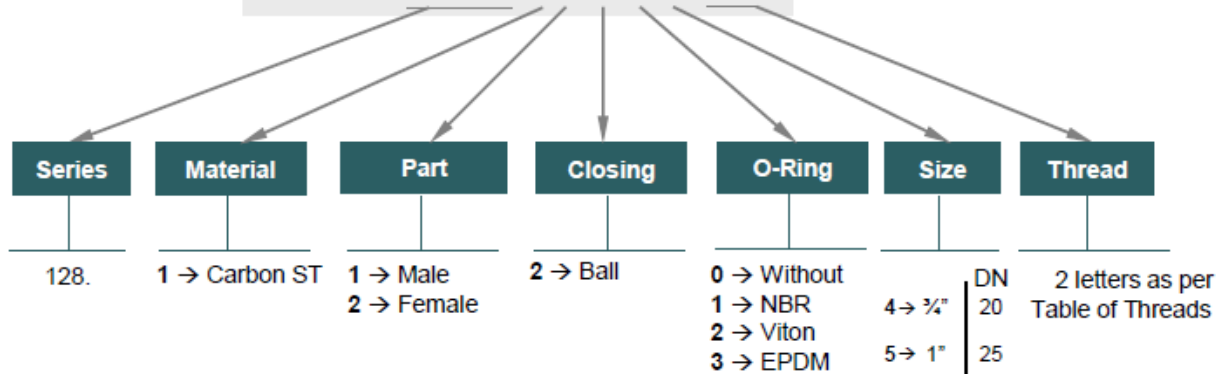



## 128-1







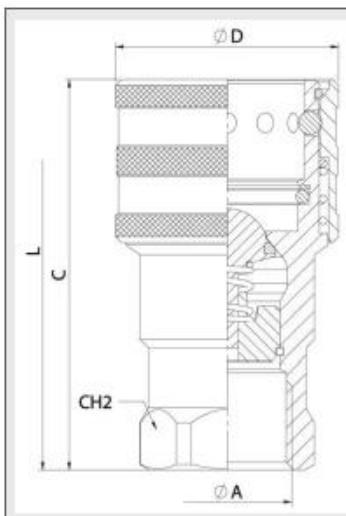
# 128 SERIES TVZ

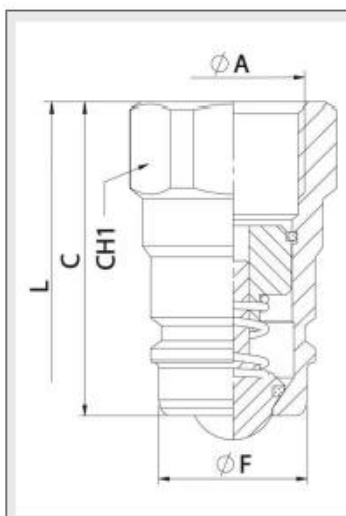


MALE							
DN	ØA	CH1	C	ØF	L	REF.	
20	¾" BSP	36	59	28	117,50	128.11214AE	250Bar
25	1" BSP	41	72	36,50	138	128.11215AF	230Bar

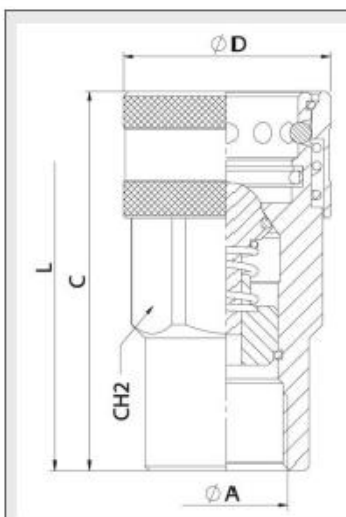

FEMALE							
DN	ØA	CH2	C	ØD	L	REF.	
20	¾" BSP	38	83,50	45,50	117,50	128.12214AE	250Bar



FEMALE							
DN	ØA	CH2	C	ØD	L	REF.	
25	1" BSP	41	105	57,50	138	128.12215AF	230Bar